




BACK VIEW

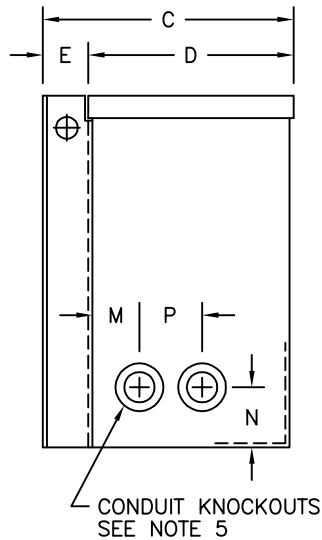

SIDE VIEW

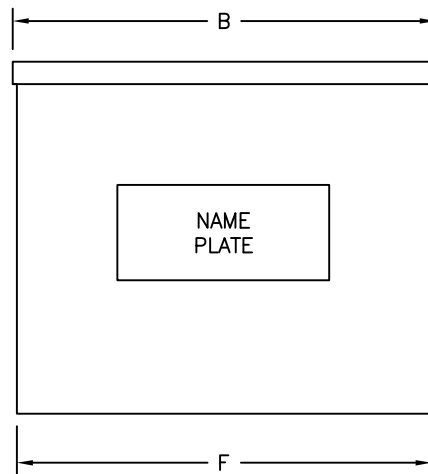

FRONT VIEW

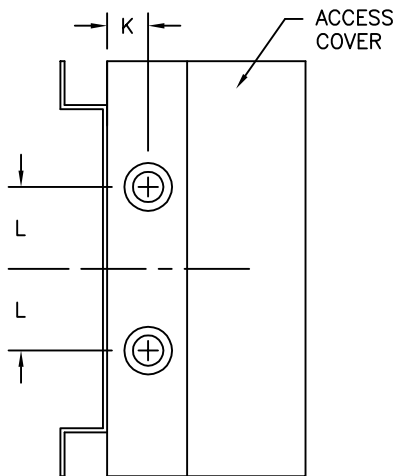

BOTTOM VIEW

NOTES:

1. ALL UNITS CUL AND UL LISTED AND ARE DESIGNED IN ACCORDANCE WITH APPLICABLE NEMA, ANSI, AND IEEE STANDARDS.
2. TRANSFORMERS ARE ENCAPSULATED CONSTRUCTION.
3. TRANSFORMERS ARE 115°C RISE.
4. TRANSFORMERS ARE WALL MOUNTED. FOR INDOOR/OUTDOOR USE.
5. CONDUIT KNOCKOUTS -
 3 THRU 9 KVA - 7/8 DIA. FOR 1/2" CONDUIT & 1 1/8 DIA. FOR 3/4" CONDUIT.
 15 KVA - 1 3/8 DIA. FOR 1" CONDUIT & 2 1/2 DIA. FOR 2" CONDUIT.
6. PAINT COLOR IS ANSI 61, LIGHT GRAY.
7. * MOUNTING HOLE LOCATIONS, 3/8" MOUNTING HARDWARE REQUIRED.

CERTIFIED DIMENSIONS (INCHES)

KVA	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T	MAX. WT. IN LBS.
3	12 1/16	12 1/8	8 3/8	6 1/2	1 7/8	12	6 1/2	2	3 1/2	1 1/8	2 21/32	1 1/8	1 3/4	2	10	-	95
6	14 9/16	20 1/8	10 5/8	8 3/4	1 7/8	20	6 1/2	2	6	1 1/2	2 13/32	2	2 3/8	3	18	-	225
9	14 9/16	20 1/8	10 5/8	8 3/4	1 7/8	20	6 1/2	2	6	1 1/2	2 13/32	2	2 3/8	3	18	-	270
15	16 1/16	21 1/8	15 1/8	13 1/4	1 7/8	21	8	2	6	2 1/8	2 13/32	2 3/8	2 3/8	3 1/2	19	-	435

KVA	QTY.	CATALOG NO.	VOLTAGE		TAPS	DRAWINGS
			PRIMARY	SECONDARY		
9		TE4D9F	480	208Y/120	-2 X 5%	<input type="checkbox"/> APPROVAL <input checked="" type="checkbox"/> RECORD <input type="checkbox"/> OTHER

JOB						
P.O.			CUST			
TIE		BY ADT	ENG. LOG.		TITLE	
S.O.		DATE 5/7/96			GENERAL PURPOSE TRANSFORMER THREE PHASE, 600 VOLT CLASS, 60HZ.	
		APP	MFG. LOC		DWG. NO.	
		APP	DWG. FILE		D4808A0031	
					REV	A
					DATE: 8/14/97	